




Jobsite™

Concrete, Tile & Masonry Cleaner Concentrate

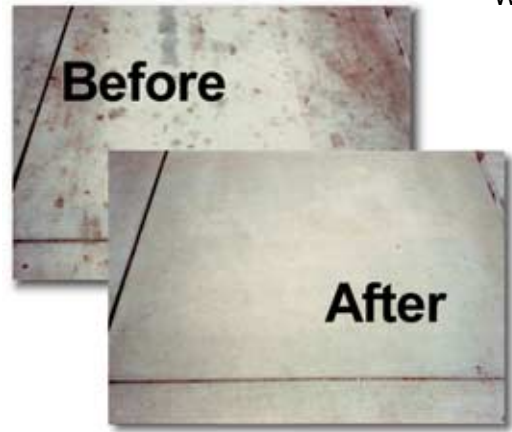

Description:

White Mountain **Jobsite** is a complete all around concrete and masonry cleaner. It is an alkaline (pH plus 12) cleaner that works exceedingly well on grease, oil, grime, food stains from concrete, tile & masonry surfaces. It is a complete cleaner for any surface that is to be sealed, painted or stained – no other cleaner is required. This easy to use, safe, biodegradable, non-acid cleaner, does not form noxious fumes nor damage lawns or shrubs. **Jobsite** comes in a highly concentrated form and can be diluted with up to 9 parts water making it an extremely cost effective cleaner. Its dilution rate with water determines the cleaning power.

For Use On:

- Remove food stains, dirt, oil and grease from tile, concrete, brick, stone, grout, wood and plastic
- Clean garage floors and driveways
- Degrease barbecues
- Remove soot from stone fireplaces
- Suntan lotions from swimming pool decks

Jobsite will outperform any cleaner of its type, however, completely extracting the oil or stain once it is solubilized may require the use of a power washer, steam, or a vacuum method.

Features:

- Concentrated
- Biodegradable
- Very effective on grease and oil.
- Water base safe.

Limitations:

Not a paint or efflorescence remover.

Specifications:

- VOC:** [as packaged] 0 g/l – (0 lbs./gal.)
- WEIGHT PER GALLON:** [average] 9 lbs.
- FLASH POINT:** [setaflash] None
- ODOR:** Mild
- PACKAGE VISCOSITY:** sec. Zahn Cup #2
- SOLIDS:** [average]
 - By Weight 0 %
 - By Volume 0 %
- COVERAGE:** [average]
 - Mix ratio. 1 - 1 9 - 1
 - In sq.ft./gal 190 1600
 - [For exact coverage rates, a measured quantity to proper saturation over a known area will provide a square foot coverage rate for a specific job.]
- ORDER CODE:** W3-02
- PACKAGING:** [average]
 - 4 -1 gallon plastic jugs per case 40 lbs.
 - 1 - 5 gallon pail 50 lbs.
- SHIPPING DESCRIPTION:** [CFR 49]
 - Ground/Air/Vessel: Not Regulated
- UNIFORM FIRE CODE:** [CFR 29] Non combustible
- STORAGE TEMPERATURE:** 35° F. - 120° F.
Keep Water Base Products From Freezing!
- SHELF LIFE:** [warranted] 1 Year
- "HMIS" RATINGS:** H - 1; F - 0; R - 0; PP - H



Jobsite™ : Concrete, Tile & Masonry Cleaner Concentrate

IMPORTANT NOTE: Before use on a job, thoroughly test this product on a sample to assure performance and appearance.

Preparation:

CAUTION: Always do a small test area to be sure that the cleaner is not removing or damaging the surrounding surface coating or sealer.

Water down surrounding plants, ground cover and grass to avoid temporary discoloration.

Remove excess dirt and debris from surface to be cleaned.

Application:

- Mix up to 9 parts water with 1 part White Mountain **Jobsite** and apply to surface with a sprayer or other manual method. If not sure which dilution is best, start with a light solution and add cleaner until you get the best results.
- Let stand 2 to 5 minutes.
- Scrub surface with a stiff broom or brush.
- Rinse off. Squeegee dry if required.
- If cleaner dries on surface reapply and continue.

RECOMMENDED DILUTION RATES

- 1:1** Heavily soiled, ground in dirt, deep seeded and/or old oil stains, transmission fluid stains, tire marks.
- 3:1** Moderate stains from oil and grease, ground in dirt and grime, vegetable oil stains, and organic stains.
- 5:1** Mild or new oil stains, mild to moderate soiling.
- 7:1** General purpose cleaning, mild degreasing, acid neutralization.
- 9:1** Equal to most household cleaners.

Use the same dilution ratio with a pressure washer or automatic floor scrubber. If pressure washer or scrubber is used, hand scrubbing is not necessary,

For extremely heavy duty cleaning jobs, you can use White Mountain **Jobsite** without dilution.

Warm water makes **Jobsite** a more efficient cleaner — use when possible.

CLEAN UP: Flush with clean water

Safety Information:

CAUTION: LIQUID CONTACT WITH EYE AND SKIN CAUSES IRRITATION. DO NOT INGEST. Contains a small percentage of potassium hydroxide which can cause skin and eye irritation if prolonged contact occurs. Wear proper protective gloves and eye covers when using. Avoid contact with eyes and skin. Wash hands thoroughly after using and before eating and smoking. If spillage has occurred, absorb and dispose of according to local regulations.

FIRST AID: Should eye contact occur, flush with plenty of water for at least 15 minutes and get medical attention if vision is disturbed. For skin wash thoroughly with soap and water. If swallowed get medical attention immediately. DO NOT induce vomiting.

**KEEP THIS PRODUCT OUT OF
THE REACH OF CHILDREN.**

(09/11/03)

WARRANTY: The statements made herein, on labels, product bulletins, or by any of Triangle Coatings', Inc. employees or agents concerning this product are given for general information only. Due to variables beyond Triangle's control in application, surface preparation, surface temperature, humidity and other variable factors Triangle assumes no liability for any claim that may arise out of the use of its products and disclaims any warranty expressed or implied relating to the storage, application, thinning, merchantability, Buyer's assumption of performance, and the fitness for a particular purpose. Receipt of products from Triangle or its agents constitutes acceptance of the terms of this warranty. In the event that Triangle finds that the product delivered is not of Triangle's standard quality, Triangle will at its sole discretion, either replace the product or refund the purchase price. Triangle's choice of one of these remedies shall be the Buyer's sole remedy. Triangle will under no circumstances be liable for consequential damages, except insofar as liability is mandated by law. Triangle will deliver products at agreed times insofar as it is reasonably able to do so, but it will not be liable for failure to deliver on time when the failure is beyond its reasonable control.